

Enjoy all the functionality of the Alpha unit with the New and more affordable Beta unit featuring a brand new easy-to-install mounting clip.

DIMENSIONS:

Width (excl. clip) 60mm (Approx. 2-2/5 in.)

Length: Depending on configuration

Height (excl. clip): 42mm (Approx. 1-7/10 in.)

ELECTRICAL:

Operating Voltage: 110V - 250V @ 50 - 60 Hz

Input Cable Type: 16A or 20A

MAINTENANCE AND CARE:

Ensure unit is disconnected prior to cleaning.

Clean the unit with a damp cloth and dry immediately.

Do not use harsh chemical solvents.



©2016 Copyright Powerlogic SA (Pty) Ltd. All Rights Reserved. Due to continual product improvements and upgrades, Power Logic reserves the right to amend and change products as it sees fit. As such, images of products are for indicative purposes only and actual products may vary from those depicted and certain options may be unavailable. Always check with your distributor or with Power Logic regarding availability of the product of your choice.

FEATURES

POWER OUTLETS

Choose from 24 international power outlets available in black, grey and white. Optional colours are also available on special request (subject to minimum order quantity).

MINIMALIST DESIGN

Sleek aesthetics add a stylish touch to any professional environment.

SWITCHES

The unit is able to house various Standard and Reset Switches. Please see the peripheral options page.


SMART CHARGING USB

The smart, dual port USB charger that can detect connected Apple®, Android® and Windows® mobile devices whilst providing fast charging. It supports sleep mode charging for most Apple® products and is compatible with USB 2.0 and 3.0 portable devices. A maximum, overall current of 2.1A is available for the dual USB ports.*


INTERCONNECTION

Beta units can be interconnected directly, or they can be linked with interconnecting 3PP cables.

Please note that Power Logic in no way endorses these brands. Apple®, Android® and Windows® are Proprietary Trademarks of Apple®, Google® and Microsoft® respectively.

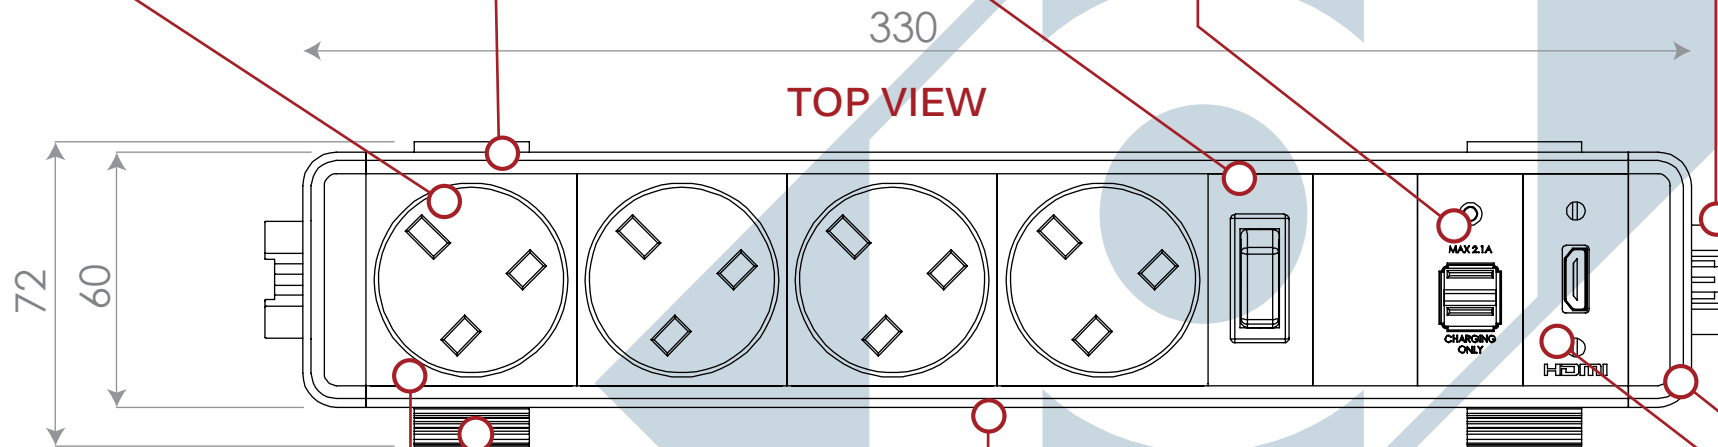

TOP VIEW

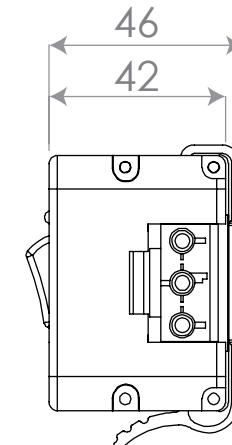

SIDE VIEW


MOUNTING

The Beta extrusion has been manufactured with grooves running along the length of the body. These grooves, along with a specially designed mounting clip allows for easy mounting of the product on almost any surface. These clips can also be fastened to a desk clamp that clamps on to work surfaces at 45°.

AESTHETICS

The extrusion is only available in a Charcoal colour while the interfaces are available in black, grey and white.

PERIPHERAL OPTIONS

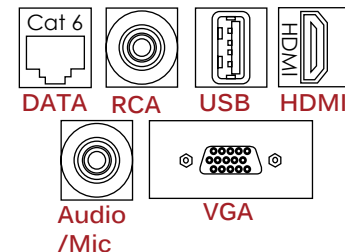

ROBUST CONSTRUCTION

The body of the unit is manufactured from high quality, extruded plastic making it a very durable product.

VARIOUS CONFIGURATIONS

Units can be assembled in almost any configuration with a wide variety of power outlets, peripherals and colours to choose from