

OBLIQUE

General Information

5

DIMENSIONS:

Width: 55mm (Approx. 2 1/5 in.)

Length:

2-Way: 204mm (Approx. 8 in.)

3-Way: 273mm (Approx. 10 3/4 in.)

4-Way: 342 mm (Approx. 13 1/2 in.)

Total Height: 36.5mm (Approx. 1 2/5 in.)

WORK SURFACE THICKNESS:

10mm - 50mm (Approx. 0.4 in. - 2 in.)

ELECTRICAL:

Operating Voltage: 220V - 250V @ 50 Hz

110V - 125V AC @ 60 Hz

Current: 15A (20A - upgraded wiring)

Max Power: 1800W @ 110V - 125V AC

3000W @ 220V - 250V AC

MAINTENANCE AND CARE:

Ensure unit is disconnected prior to cleaning.

Clean the unit with a damp cloth and dry immediately.

Do not use harsh chemical solvents.

The affordable Oblique unit is perfect for an expanding business due to its 3PP interconnectable capabilities.



©2016 Copyright Powerlogic SA (Pty) Ltd. All Rights Reserved. Due to continual product improvements and upgrades, Power Logic reserves the right to amend and change products as it sees fit. As such, images of products are for indicative purposes only and actual products may vary from those depicted and certain options may be unavailable. Always check with your distributor or with Power Logic regarding availability of the product of your choice.

POWER OUTLET OPTIONS

Choose from 24 international power outlets available in black, grey and white. Optional colours are also available. Contact your closest distributor or www.powerlogic.net for more information.

POWER OUTLET ORIENTATION

All power outlets are pre-fitted at any angle in 15° increments. See reverse for details

SWITCHES

The unit is able to house a 15A Thermal Overload Switch as well as other standard red and green switches depending on the client's request.


MOUNTING OPTIONS

The Oblique is usually a stand alone unit that can be screwed onto any surface through its mounting holes. There are also desk clamp options available (See reverse).

BUILT-IN PROTECTION


The unit adheres to international safety rules and regulations with its optional double insulation design.

SIDE VIEW



35.8
41.1

TOP VIEW

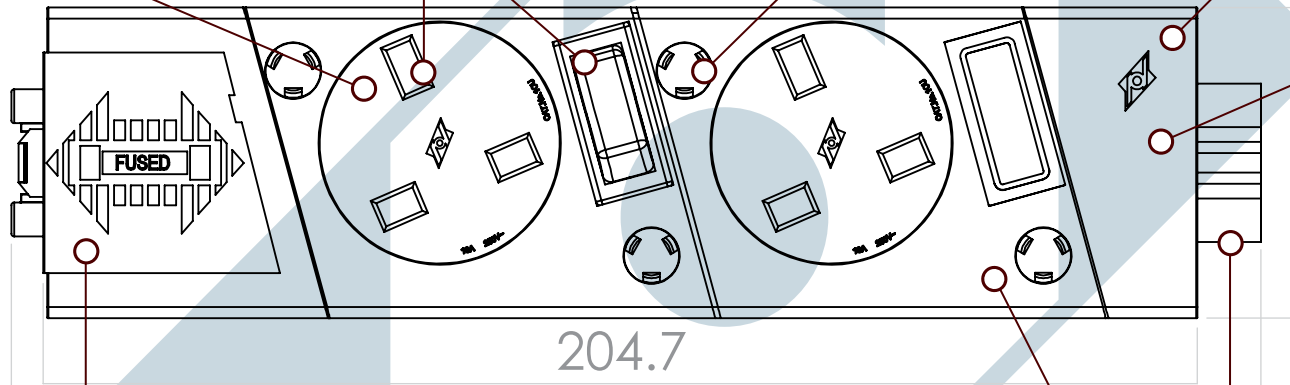

204.7
221.6

UNIT OPTIONS

The Oblique is a plastic, molded unit that is available as a 2-way (as illustrated here), 3-way or 4-way power outlet system that can interlock making even larger configurations.

55


POWER OPTIONS

The unit has Hybrid Power capabilities (power & data) and is also able to house one or more circuits in a single unit.

PROTECTION

The unit can be fitted with Fuses, Power Filters, Circuit breakers and earth leakage devices. Contact your distributor for more information.

PERIPHERAL OPTIONS

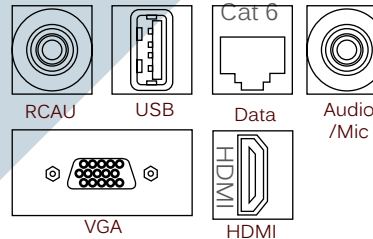

INTERCONNECTING

Obliques are fitted with detachable cable(s) which connect to the unit with a 3PP connector allowing the unit to be chain linked making it perfect for office use.

FEATURES

