

V-DOCK

General Information

25

DIMENSIONS:

Cut-out width: 126.5mm (Approx. 5 in.)
Cut-Out length: Depending on Configuration
Total Height: 100.5mm (Approx. 4 in.)

WORK SURFACE THICKNESS:

Various thickness can be accommodated but the maximum recommend thickness is 100mm (Approx. 4 in.).

ELECTRICAL:

Operating Voltage: 220V - 250V AC @ 50 Hz
110V - 125V AC @ 60 Hz
Current: 15A (20A with upgraded wiring)
Max Power: 1800W @ 110V - 125V AC
3000W @ 220V - 250V AC

MAINTENANCE AND CARE:


Ensure unit is disconnected prior to cleaning.
Clean the unit with a damp cloth and dry immediately.
Do not use harsh chemical solvents.

The V-Dock is the perfectly hidden unit that attaches to the underside of the work surface. It allows for the end user to cover the unit with any hinged flap or roller cover of their design.




©2016 Copyright Powerlogic SA (Pty) Ltd. All Rights Reserved. Due to continual product improvements and upgrades, Power Logic reserves the right to amend and change products as it sees fit. As such, images of products are for indicative purposes only and actual products may vary from those depicted and certain options may be unavailable. Always check with your distributor or with Power Logic regarding availability of the product of your choice.

FEATURES

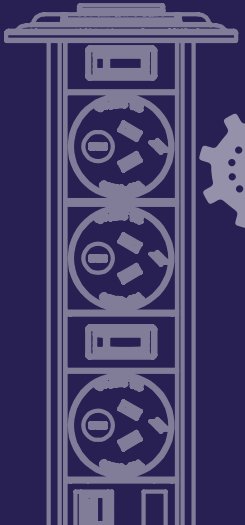

PERIPHERALS OPTIONS

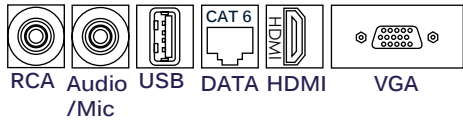


BASE OPTIONS

Choose between a rubber flap base, bristle base or solid base for the unit.


SWITCHES

The unit is able to house a 15A Thermal Overload Switch as well as other standard red and green switches depending on the client's request.

TOP VIEW

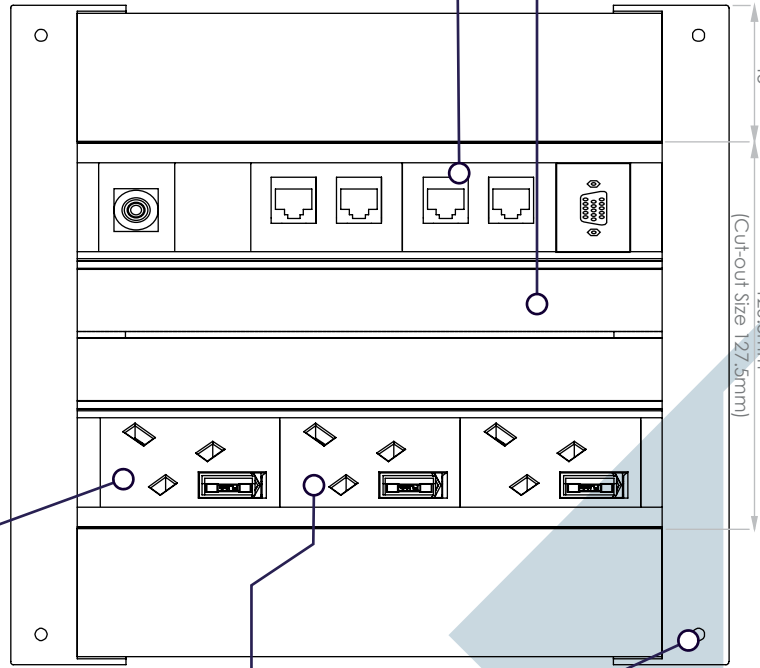

SIDE VIEW

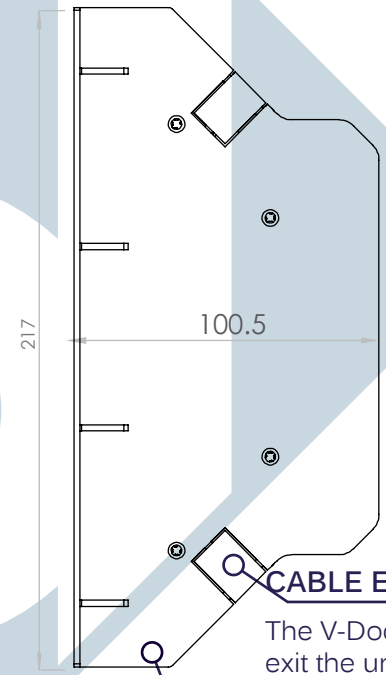

POWER OUTLETS

Choose from the Australian, Brazilian, SA, Schuko, Swiss, US and UK power outlets available in black, grey and white. Limited orientations available, see reverse for details. Optional colours are also available. Visit our website for more information: www.powerlogic.net.

UNLIMITED CONFIGURATIONS

The possibilities are nearly endless with a wide variety of power outlets, data/voice connections, switches and protection devices available in almost any configuration.

MOUNTING

Simply align the V-Dock below a pre-cut aperture and fix it in position with suitable M4 screws (Screws not included). In the event that the unit surpasses 250mm, additional mounting hole will be added along the length of the aluminium for extra support.

CABLE EXIT

The V-Dock allows for cables to exit the unit either horizontally or at a 45° angle on any preselected corner.

AESTHETICS

The unit has a wide variety of colours and finishes for both metal and plastic components that are sure to complement any environment. Contact your distributor for detailed options.