



OBLIQUE

An affordable modular power & data system,
perfect for an expanding business with it's
3PP interconnective capabilities.

OBLIQUE

The Oblique range is an electrical power system which is available in two, three and four way outlet options.

The Oblique range is made from a high grade plastic material.

Each version can be supplied with a variety of switch options as well as fuse options.



MCB Housing



189-1033 10A MCB, 3Pin male / 3Pin female
189-2033 16A MCB, 3Pin male / 3Pin female
189-3033 10A MCB, 20mm / 3Pin female
189-4033 16A MCB, 20mm / 3Pin female

RCBO Housing



185-1033 10A MCB, 3Pin male / 3Pin female
185-2033 16A MCB, 3Pin male / 3Pin female
185-3033 10A MCB, 20mm / 3Pin female
185-4033 16A MCB, 20mm / 3Pin female

2 Port Voice Data Housing



102-0052 Cat5e, 2m 102-0062 Cat6, 2m
102-0053 Cat5e, 3m 102-0063 Cat6, 3m
102-0055 Cat5e, 5m 102-0065 Cat6, 5m

4 Port Voice Data Housing



104-0052 Cat5e, 2m 104-0062 Cat6, 2m
104-0053 Cat5e, 3m 104-0063 Cat6, 3m
104-0055 Cat5e, 5m 104-0065 Cat6, 5m

199-5000 Oblique Face Mounting Plate VDH



120-1010 2 x UK individually fused



199-2000 Oblique Face Mounting Plate 2 Way



120-2010 2 x UK individually fused | with switch



130-1010 2 x UK individually fused



199-3000 Panel Mount for 3 Way



130-2010 3 x UK individually fused | with switch



140-1010 4 x UK individually fused




140-2010 4 x UK individually fused | with switch




199-4000 Oblique Face Mounting Plate 4 Way



We can supply all our power products with a vast range of approved international power sockets. (full details in the technical brochure).

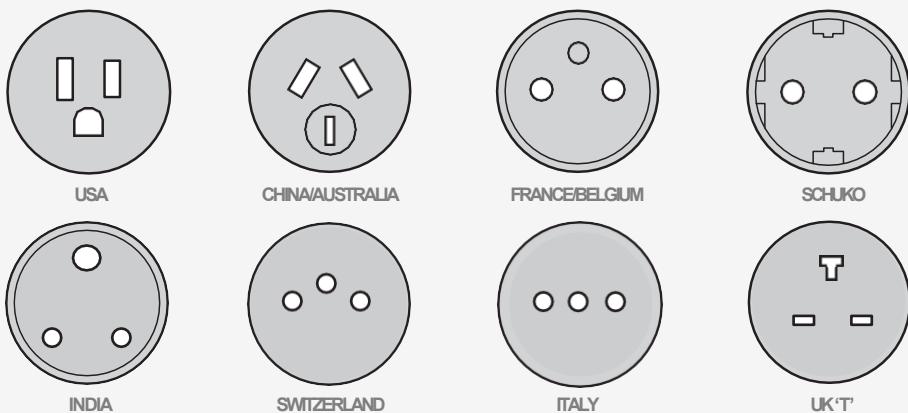


We stock a vast range of Data and AV interfaces that can be fitted within the Oblique range (full details in the technical brochure). We also stock the associated cables in lengths from 1 to 10 metres.

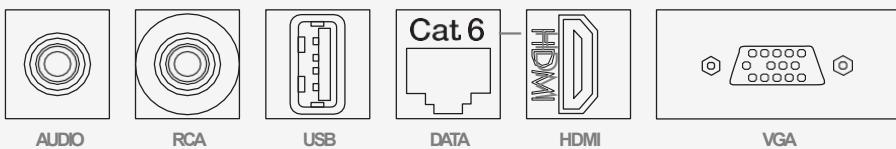

BUILT-IN PROTECTION

The unit adheres to inter-national safety rules and regulations with its optional double insulation design




UNIT OPTIONS

The Oblique is a molded unit that is available as a 2 way (as illustrated here), 3 way or 4-way power outlet system that can interlock making even larger configurations.

PROTECTION

The unit can be fitted with fuses, Power Filters, Circuit Breakers and earth leakage device

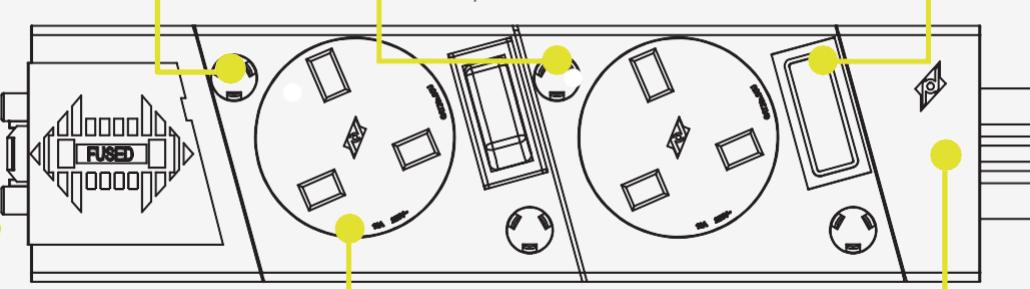

INTERCONNECTING

Obliques are fitted with detachable cable(s) which connect to the unit with a 3PP connector allowing the unit to be chain linked making it perfect for office use.

MOUNTING OPTIONS

Oblique is usually a stand-alone unit that can be screwed to any surface through mounting holes. Desk clamps are available

SWITCHES

The unit is able to house a 15A Thermal Overload Switch as well as other standard red and green switches

POWER OUTLET ORIENTATION

All power outlets are permitted in 15° increments

POWER OPTIONS

The unit has Hybrid Power capabilities (power and data) and is also able to house one or more circuits in a single unit

ELECTRICAL

Operating Voltage: 220V-250V @ 50 Hz, 110V-125V AC @ 60 Hz Current: 15A (20A – upgraded wiring), Max Power: 1800W @ 110V-125V AC, 3000W @ 220V - 250V AC

DIMENSIONS

Width: 55mm (approx. 2¹/₅"), Length: 2-Way: 204mm (approx. 8"), 3-Way: 273mm (approx. 10³/₄"), 4-Way: 342 mm (approx. 13¹/₂"), Total Height: 36.5mm (approx. 2²/₅")

Broad Power Limited

Unit 1, 27 Black Moor Road
Ebblake Industrial Estate
Verwood, Dorset
BH31 6BE

Telephone:

01258 841001

Email:

sales@broadpower.co.uk