

DIMENSIONS:

Total Height: 379.6mm (Approx 15 in.)
Max Width: 103 (Approx. 4 in.)
Mounting Hole: 80mm (Approx. 3-1/5 in.)

WORK SURFACE THICKNESS:

10mm - 50mm (Approx. 2/5 in. - 2 in.)

ELECTRICAL:

Operating Voltage: 220V - 250V @ 50 Hz
Current: 15A (3-pin outlet)
10A (2-pin outlet)
Max Power: 3000W @ 220V - 250V AC

MAINTENANCE AND CARE:

Ensure unit is disconnected prior to cleaning.
Clean the unit with a damp cloth and dry immediately.
Do not use harsh chemical solvents.

The PDV is the perfect customizable solution for kitchens, workshops, TV stands, office desks and so much more!



©2016 Copyright Powerlogic SA (Pty) Ltd. All Rights Reserved. Due to continual product improvements and upgrades, Power Logic reserves the right to amend and change products as it sees fit. As such, images of products are for indicative purposes only and actual products may vary from those depicted and certain options may be unavailable. Always check with your distributor or with Power Logic regarding availability of the product of your choice.

15A THERMAL OVERLOAD SWITCH

Protects the unit and other products connected to it from getting damaged in the case of a power surge.

VARIABLE POWER OUTLET ANGLE

A power outlet can be rotated at any angle in 45° increments.


POWER OUTLETS

Choose between 24 international power outlets. Visit our website for options: www.powerlogic.net

SHUTTERED POWER OUTLETS

Power outlets come with a built-in shutter to protect against foreign objects being plugged in.

PERIPHERAL OPTIONS

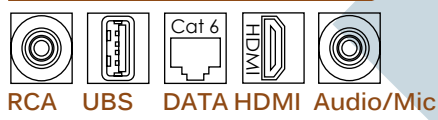


LOCK RELEASE BUTTON

Button keeps unit locked in the raised position and releases lock once pressed to allow for lowering unit back into work surface.

LOCKING COLLAR RING

A robust locking collar for quick and easy installation.

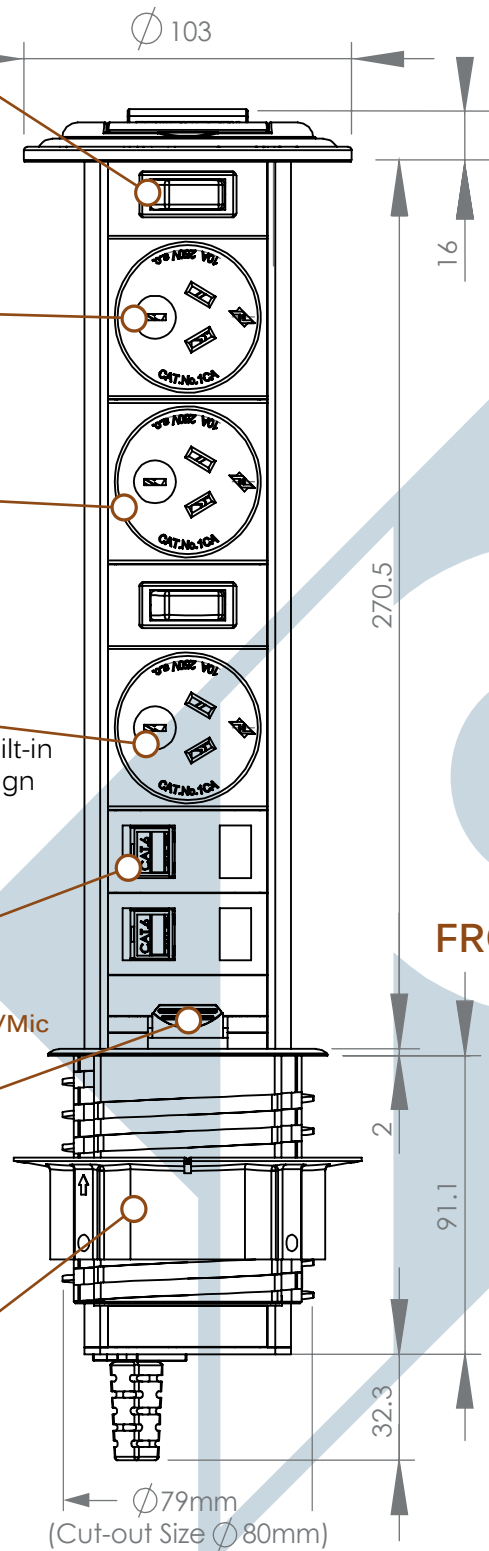

FRONT VIEW

HANDLES


Two fold-flat chromed handles raise the unit out of the work surface and lower it back in.

SPLASH PROOF SEAL

Unit comes with a rubber seal to protect against liquid spills.

ALUMINIUM CAP COVER

Aluminium cap cover to protect the rubber seal.



TOP VIEW

FEATURES

