



VERTICAL POWERDOCK

Vertical Powerdock provides a discrete solution for power, data and USB charging. Now with the PDS version you can have full connectivity even when lowered!

VERTICAL POWERDOCK

Most commonly used in board-rooms, meeting rooms and breakout areas, our Vertical Powerdock provides an elegant solution for Power, USB Charging, Data and AV sockets on the work surface. Our PD3 version can even be closed whilst in use providing the ultimate discrete solution. Quick and easy to install the Vertical Powerdocks can be customised to suit individual requirements.



1 x UK fused | Dual Smart Charge USB | 2 x data points | 1 x HDMI



41S2-1055H2 Cat5e, 2m
41S2-1055H3 Cat5e, 3m
41S2-1055H3 Cat5e, 5m
41S2-1066H2 Cat6, 2m
41S2-1066H3 Cat6, 3m
41S2-1066H5 Cat6, 5m

1 x UK individually fused | Dual Smart Charge USB | 2 x data points



42S2-1052 Cat5e, 2m
42S2-1053 Cat5e, 3m
42S2-1055 Cat5e, 5m
42S2-1062 Cat6, 2m
42S2-1063 Cat6, 3m
42S2-1065 Cat6, 5m

2 x UK individually fused | 2 x data points



422-1052 Cat5e, 2m
422-1053 Cat5e, 3m
422-1055 Cat5e, 5m
422-1062 Cat6, 2m
422-1063 Cat6, 3m
422-1065 Cat6, 5m

2 x UK individually fused | 4 x data points



424-1052 Cat5e, 2m
424-1053 Cat5e, 3m
424-1055 Cat5e, 5m
424-1062 Cat6, 2m
424-1063 Cat6, 3m
424-1065 Cat6, 5m

3 x UK individually fused | 2 x data points



- 432-1052 Cat5e, 2m
- 432-1053 Cat5e, 3m
- 432-1055 Cat5e, 5m
- 432-1062 Cat6, 2m
- 432-1063 Cat6, 3m
- 432-1065 Cat6, 5m

3 x UK individually fused | 2 x data points



- 434-1052 Cat5e, 2m
- 434-1053 Cat5e, 3m
- 434-1055 Cat5e, 5m
- 443-1062 Cat6, 2m
- 443-1063 Cat6, 3m
- 434-1065 Cat6, 5m

4 x UK individually fused | 2 x data points



- 442-1052 Cat5e, 2m
- 442-1053 Cat5e, 3m
- 442-1055 Cat5e, 5m
- 442-1062 Cat6, 2m
- 442-1063 Cat6, 3m
- 442-1065 Cat6, 5m

4 x UK individually fused | 4 x data points



- 444-1052 Cat5e, 2m
- 444-1053 Cat5e, 3m
- 444-10552 Cat5e, 5m
- 444-1062 Cat6, 2m
- 444-1063 Cat6, 3m
- 444-1065 Cat6, 5m

4 x UK individually fused | Dual Smart Charge USB | 2 x data points




- PD3-2S2-1052 Cat5e, 2m
- PD3-2S2-1053 Cat5e, 3m
- PD3-2S2-1055 Cat5e, 5m
- PD3-2S2-1062 Cat6, 2m
- PD3-2S2-1063 Cat6, 3m
- PD3-2S2-1065 Cat6, 5m

- PD3-2S2-1152 Cat5e, 2m
- PD3-2S2-1153 Cat5e, 3m
- PD3-2S2-1155 Cat5e, 5m
- PD3-2S2-1162 Cat6, 2m
- PD3-2S2-1163 Cat6, 3m
- PD3-2S2-1165 Cat6, 5m

- PD3-2S2-1352 Cat5e, 2m
- PD3-2S2-1353 Cat5e, 3m
- PD3-2S2-1355 Cat5e, 5m
- PD3-2S2-1362 Cat6, 2m
- PD3-2S2-1363 Cat6, 3m
- PD3-2S2-1365 Cat6, 5m

— (overall 103mm) —



Two fold-flat chromed handles raise the unit out of the work surface and lower it back in

Aluminium cap cover over a rubber seal to protect against liquid spills

16mm

270.5 mm

91.1mm


— 80mm (cut-out size 80mm) —

15A thermal overload switch protects the product and units connected to it in the case of a power surge

Power outlets can be rotated to any angle in 45° increments

Choose between 24 different international power outlets


Power outlets come with a built-in shutter to protect against foreign objects being plugged in peripheral options



Lock release button keeps unit locked in the raised position and releases when pressed to lower into the work surface

Robust locking collar for fast and easy installation

— (overall 102mm) —



A spring-loaded swivel cap covers a smart charging dual USB port on top of the unit

A smart, dual port USB charger can detect Apple®, Android® and Windows® mobile devices while providing fast charging. It supports sleep mode charging for most Apple® products and is compatible with USB2.0 and 3.0 portable devices. Maximum 2.1A is available for the dual USB ports


226 mm

mm

146 mm

mm

— 92mm (cut-out size 92mm) —

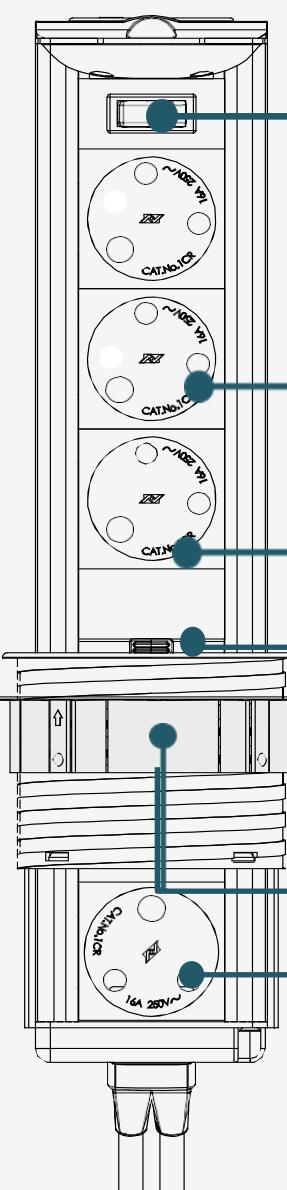

15A thermal overload switch protects the unit from power overloads

Choose between 24 different international power outlets

Power outlets are oriented to facilitate the exit of cable through the cable flap

Lock release button keeps unit locked in the raised position and releases when pressed to lower into the work surface

Robust locking collar for fast and easy installation

One power outlet is located under the work surface for products that need to be permanently connected

Broad Power Limited

Unit 1, 27 Black Moor Road
Ebblake Industrial Estate
Verwood, Dorset
BH31 6BE

Telephone:

01258 841001

Email:

sales@broadpower.co.uk