



# OBLIQUE

An affordable modular power & data system, perfect for an expanding business with it's 3PP interconnective capabilities.

# OBLIQUE

The Oblique range is an electrical power system which is available in two, three and four way outlet options.

The Oblique range is made from a high grade plastic material.

Each version can be supplied with a variety of switch options as well as fuse options.



## MCB Housing



- 189-1033** 10A MCB, 3Pin male / 3Pin female
- 189-2033** 16A MCB, 3Pin male / 3Pin female
- 189-3033** 10A MCB, 20mm / 3Pin female
- 189-4033** 16A MCB, 20mm / 3Pin female

## RCBO Housing



- 185-1033** 10A MCB, 3Pin male / 3Pin female
- 185-2033** 16A MCB, 3Pin male / 3Pin female
- 185-3033** 10A MCB, 20mm / 3Pin female
- 185-4033** 16A MCB, 20mm / 3Pin female

## 2 Port Voice Data Housing



- 102-0052** Cat5e, 2m
- 102-0053** Cat5e, 3m
- 102-0055** Cat5e, 5m
- 102-0062** Cat6, 2m
- 102-0063** Cat6, 3m
- 102-0065** Cat6, 5m

## 4 Port Voice Data Housing



- 104-0052** Cat5e, 2m
- 104-0053** Cat5e, 3m
- 104-0055** Cat5e, 5m
- 104-0062** Cat6, 2m
- 104-0063** Cat6, 3m
- 104-0065** Cat6, 5m

**199-5000** Oblique Face Mounting Plate VDH



**120-1010** 2 x UK individually fused



**199-2000** Oblique Face Mounting Plate 2 Way



**120-2010** 2 x UK individually fused I with switch



**130-1010** 2 x UK individually fused



**199-3000** Panel Mount for 3 Way



**130-2010** 3 x UK individually fused I with switch



**140-1010** 4 x UK individually fused




**140-2010** 4 x UK individually fused I with switch




**199-4000** Oblique Face Mounting Plate 4 Way



**POWER LOGIC** are the recognised market leader throughout the world. As such we can supply all our power products with a vast range of approved international power sockets. (full details in the technical brochure).

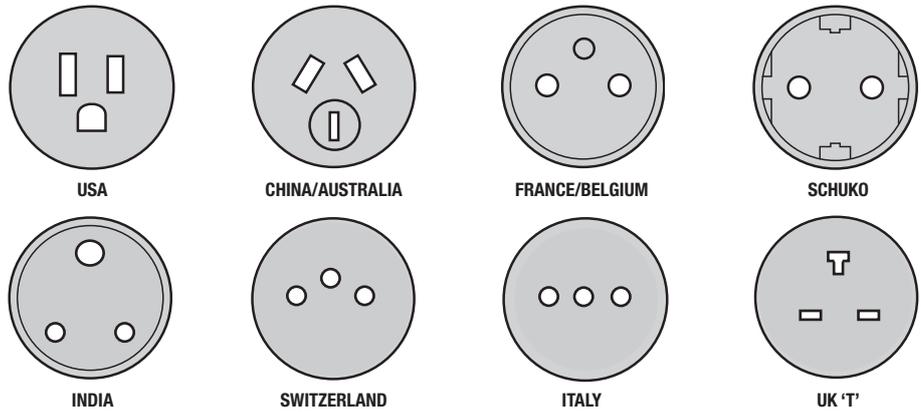

We stock a vast range of Data and AV interfaces that can be fitted within the Oblique range (full details in the technical brochure). We also stock the associated cables in lengths from 1 to 10 metres.

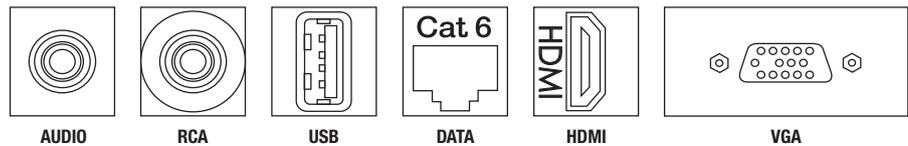

**BUILT-IN PROTECTION**

The unit adheres to international safety rules and regulations with its optional double insulation design

**PROTECTION**


The unit can be fitted with fuses, Power Filters, Circuit Breakers and earth leakage devices

**MOUNTING OPTIONS**

Oblique is usually a stand-alone unit that can be screwed to any surface through mounting holes. Desk clamps are available

**SWITCHES**

The unit is able to house a 15A Thermal Overload Switch as well as other standard red and green switches

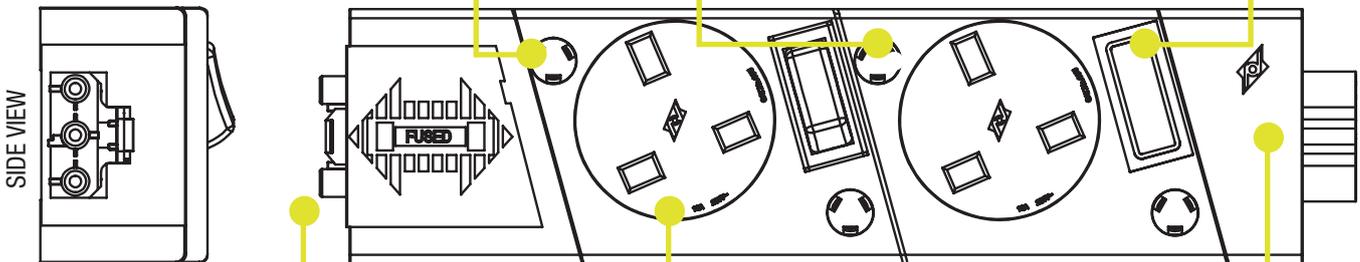

**UNIT OPTIONS**

The Oblique is a molded unit that is available as a 2-way (as illustrated here), 3-way or 4-way power outlet system that can interlock making even larger configurations.

**INTERCONNECTING**

Obliques are fitted with detachable cable(s) which connect to the unit with a 3PP connector allowing the unit to be chain linked making it perfect for office use.

**POWER OUTLET ORIENTATION**

All power outlets are permitted in 15° increments

**POWER OPTIONS**

The unit has Hybrid Power capabilities (power and data) and is also able to house one or more circuits in a single unit

**ELECTRICAL**

Operating Voltage: 220V-250V @ 50 Hz, 110V-125V AC @ 60 Hz  
 Current: 15A (20A – upgraded wiring), Max Power: 1800W @ 110V-125V AC, 3000W @ 220V - 250V AC

**DIMENSIONS**

Width: 55mm (approx. 2<sup>1</sup>/<sub>5</sub>" )  
 Length: 2-Way: 204mm (approx. 8"), 3-Way: 273mm (approx. 10<sup>3</sup>/<sub>4</sub>" )  
 4-Way: 342 mm (approx. 13<sup>1</sup>/<sub>2</sub>" ) Total  
 Height: 36.5mm (approx. 2<sup>2</sup>/<sub>5</sub>" )