



POWER SOLUTIONS



OMEGA

Simplify and manage your desk with easy access to power and data with the in-desk or screen mounted Omega unit.

The Omega range allows for the customisation of the number of power, voice/data, switch and protection devices according to individual needs. Available in standard, dual, or hybrid power options. Power protection modules or dual voltage systems can also be included if required. Omega is also available in a Slimline range.



1 x UK individually fused | 2 x data points | Dual smart charge USB | Cut-out dimensions 212x55mm



S8-1S2-1352 Cat5e 2m
S8-1S2-1353 Cat5e 3m
S8-1S2-1355 Cat5e 5m
S8-1S2-1362 Cat6 2m
S8-1S2-1363 Cat6 3m
S8-1S2-1365 Cat6 5m

S8-1S2-1052 Cat5e 2m
S8-1S2-1053 Cat5e 3m
S8-1S2-1055 Cat5e 5m
S8-1S2-1062 Cat6 2m
S8-1S2-1063 Cat6 3m
S8-1S2-1065 Cat6 5m

S8-1S2-1152 Cat5e 2m
S8-1S2-1153 Cat5e 3m
S8-1S2-1155 Cat5e 5m
S8-1S2-1162 Cat6 2m
S8-1S2-1163 Cat6 3m
S8-1S2-1165 Cat6 5m

2 x UK individually fused | 2 x data points | Dual smart charge USB | Cut-out dimensions 272x55mm



S8-2S2-1352 Cat5e 2m
S8-2S2-1353 Cat5e 3m
S8-2S2-1355 Cat5e 5m
S8-2S2-1362 Cat6 2m
S8-2S2-1363 Cat6 3m
S8-2S2-1365 Cat6 5m

S8-2S2-1052 Cat5e 2m
S8-2S2-1053 Cat5e 3m
S8-2S2-1055 Cat5e 5m
S8-2S2-1062 Cat6 2m
S8-2S2-1063 Cat6 3m
S8-2S2-1065 Cat6 5m

S8-2S2-1152 Cat5e 2m
S8-2S2-1153 Cat5e 3m
S8-2S2-1155 Cat5e 5m
S8-2S2-1162 Cat6 2m
S8-2S2-1163 Cat6 3m
S8-2S2-1165 Cat6 5m

2 x UK individually fused | 2 x data points | Cut-out dimensions 222x55mm



S8-202-1352 Cat5e 2m
S8-202-1353 Cat5e 3m
S8-202-1355 Cat5e 5m
S8-202-1362 Cat6 2m
S8-202-1363 Cat6 3m
S8-202-1365 Cat6 5m

S8-202-1052 Cat5e 2m
S8-202-1053 Cat5e 3m
S8-202-1055 Cat5e 5m
S8-202-1062 Cat6 2m
S8-202-1063 Cat6 3m
S8-202-1065 Cat6 5m

S8-202-1152 Cat5e 2m
S8-202-1153 Cat5e 3m
S8-202-1155 Cat5e 5m
S8-202-1162 Cat6 2m
S8-202-1163 Cat6 3m
S8-202-1165 Cat6 5m

4 x UK individually fused | 4 x data points | Cut-out dimensions 342x55mm



S8-2S2-1352 Cat5e 2m
S8-2S2-1353 Cat5e 3m
S8-2S2-1355 Cat5e 5m
S8-2S2-1362 Cat6 2m
S8-2S2-1363 Cat6 3m
S8-2S2-1365 Cat6 5m

S8-2S2-1152 Cat5e 2m
S8-2S2-1153 Cat5e 3m
S8-2S2-1155 Cat5e 5m
S8-2S2-1162 Cat6 2m
S8-2S2-1163 Cat6 3m
S8-2S2-1165 Cat6 5m

2 x UK individually fused | 2 x data points | 1 x HDMI, SVGA & 3.5mm Audio | Cut-out dimensions 283x67mm




824-1355HSA2 CAT5e 2m
824-1355HSA3 CAT5e 3m
824-1355HSA5 CAT5e 5m
824-1366HSA2 CAT6 2m
824-1366HSA3 CAT6 3m
824-1366HSA5 CAT6 5m



824-1055HSA2 CAT5e 2m
824-1055HSA3 CAT5e 3m
824-1055HSA5 CAT5e 5m
824-1066HSA2 CAT6 2m
824-1066HSA3 CAT6 3m
824-1066HSA5 CAT6 5m

824-1155HSA2 CAT5e 2m
824-1155HSA3 CAT5e 3m
824-1155HSA5 CAT5e 5m
824-1166HSA2 CAT6 2m
824-1166HSA3 CAT6 3m
824-1166HSA5 CAT6 5m


We can supply all our power products with a vast range of approved international power sockets. (full details in the technical brochure).

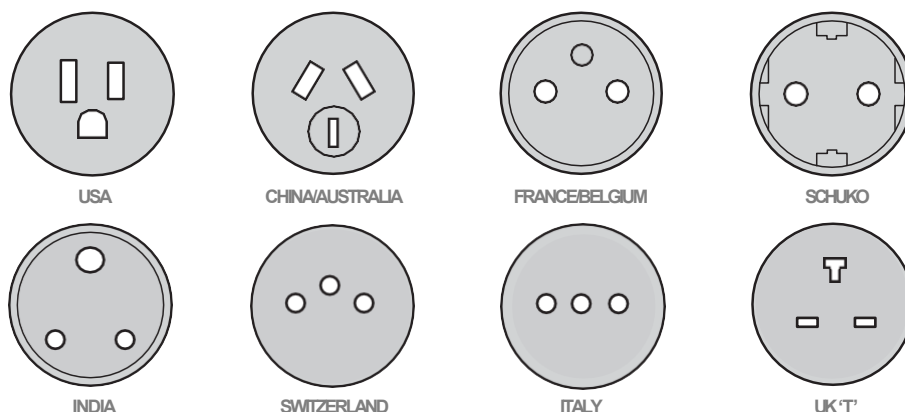

We stock a vast range of Data and AV interfaces that can be fitted within the Omega range (full details in the technical brochure). We also stock the associated cables in lengths from 1 to 10 metres.

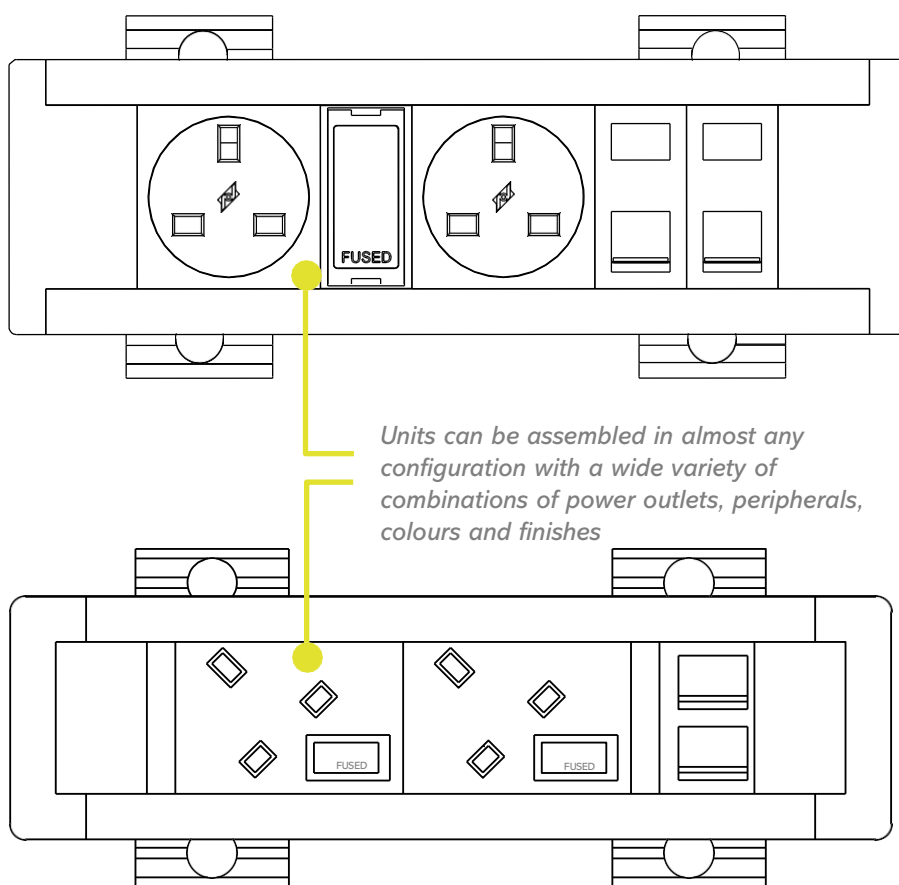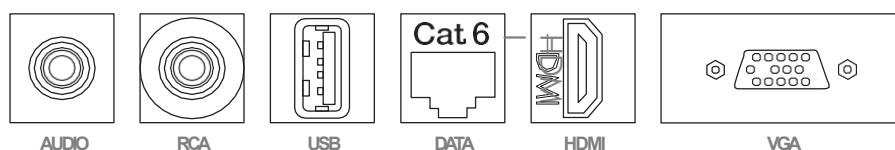

Units can be assembled in almost any configuration with a wide variety of combinations of power outlets, peripherals, colours and finishes

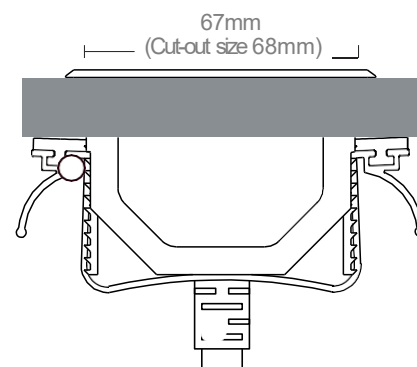


DIMENSIONS (Omega)

Cut-out width: 67mm

Cut-out length: Determined by configuration
Height: 42mm

WORK SURFACE THICKNESS:

15mm-35mm (approx. 3/5" - 1 3/5")

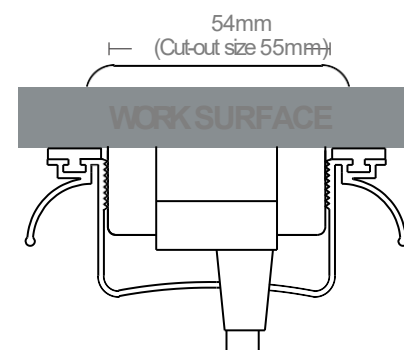

DIMENSIONS (Slimline Omega)

Cut-out width: 55mm

Cut-out length: Determined by configuration
Height: 50mm

ELECTRICAL

Operating Voltage: 220V - 250V @ 50 Hz, 110V - 125V AC @ 60 Hz, Current: 15A Max Power: 1800W @ 110V - 125V AC, 3000W @ 220V - 250V AC